

MODEL

S320



Maximum filter life will be achieved with this product when one welder is welding up to 75 pounds of weld wire per week.



Capacity: 1500 CFM @ 4.5 in.W.G.

Motor: 2HP, Direct Drive

Voltage: 3 Phase, 480V, 60Hz

Full Load Amps: 3.4

Blower: Reverse inclined high performance blower wheel

Sound Level: 72 dBA

Silencing: Integral Acoustical Plenum with Low Frequency Dampening

Controls: Manual on/off switch, Minihelic Filter Condition Gauge

Cabinet Dimensions (HxLxD): 70" x 24" x 42"

Weight: 370 lbs.

Filter Cartridge: (1) PL-14D36-A15-SF

Filter Media Area: 320 sq. ft.

Filter Type: Nanofiber MERV15

Filter Cleaning: On board compressed air tank, manual activated push-button filter pulse cleaning, 1/2"NPT compressed air connection

Dust Containment: Vacuum / sweep out filter plenum

Spark Arrestance:

Two Layer, (1) FB-24242, (1) MM-24242


Configuration: 2' x 2' Opening, Spark Arrestance Intake

Options:

- CSA Certification — CSA-100
- UL Certification — Contact Customer Service
- HEPA Filter — HP-S310
HEPA Frame — HFR-S310
- Other Voltages: 230V or 575V

Warranty:

Visit ventboss.com/terms for full warranty details.

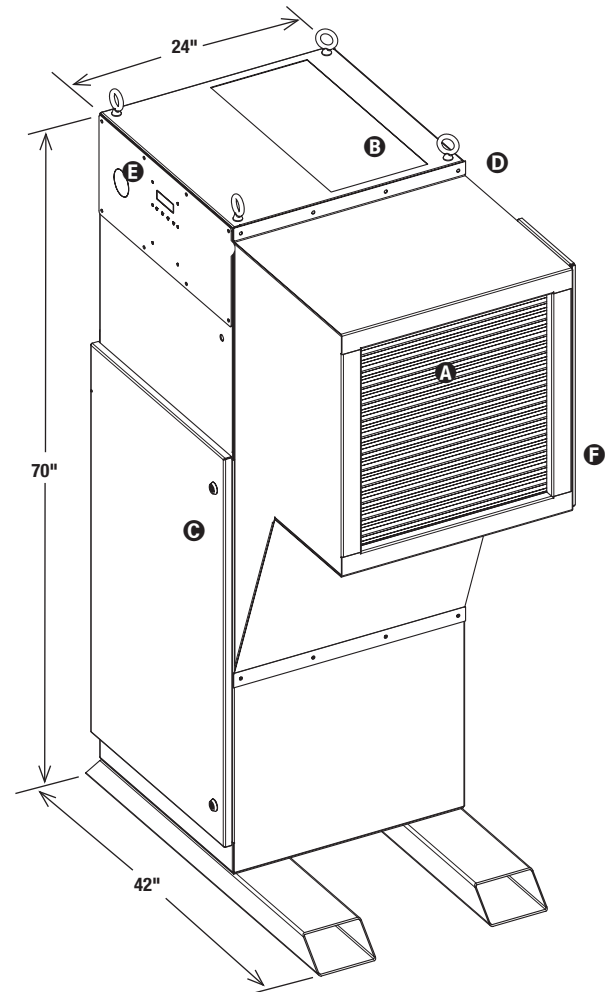

- A** Spark Arrestance Intake
- B** Clean Air Exhaust
- C** Filter Access Door
- D** Motor/Blower Access
(on back)
- E** Minihelic Filter Gauge or
Optional Digital Controller
- F** Spark Arrestance Access Door
(on side)